

TC 421 Track Conveyor **(71ft x 40")**

 **Telestack**
Mobile Bulk Material Handling



SPECIFICATION

- 3metre Tracks for site movement
- 1000mm (40") Belting.
- Optional 1050mm (42") Belting
- 21.9m (71ft) Long conveyor
- Discharge height up to 11m (36ft)

ADVANTAGES

- Reduce fuel consumption by up to 80%
- Eliminate / reduce need for wheel loader
- Eliminate material double handling
- Reduce noise, dust and emissions
- Higher quality end product
- Easy to transport / relocate



Deutz 3 Cylinder D 2011 28.75Kw (38HP)



Tracks 3m Centre x 400 shoe (10ft x 20")




Optional Dual Power or All Electric Conveyor



Heavy Duty Mid section for large lump size

TC 421 Track Conveyor (71ft x 40")

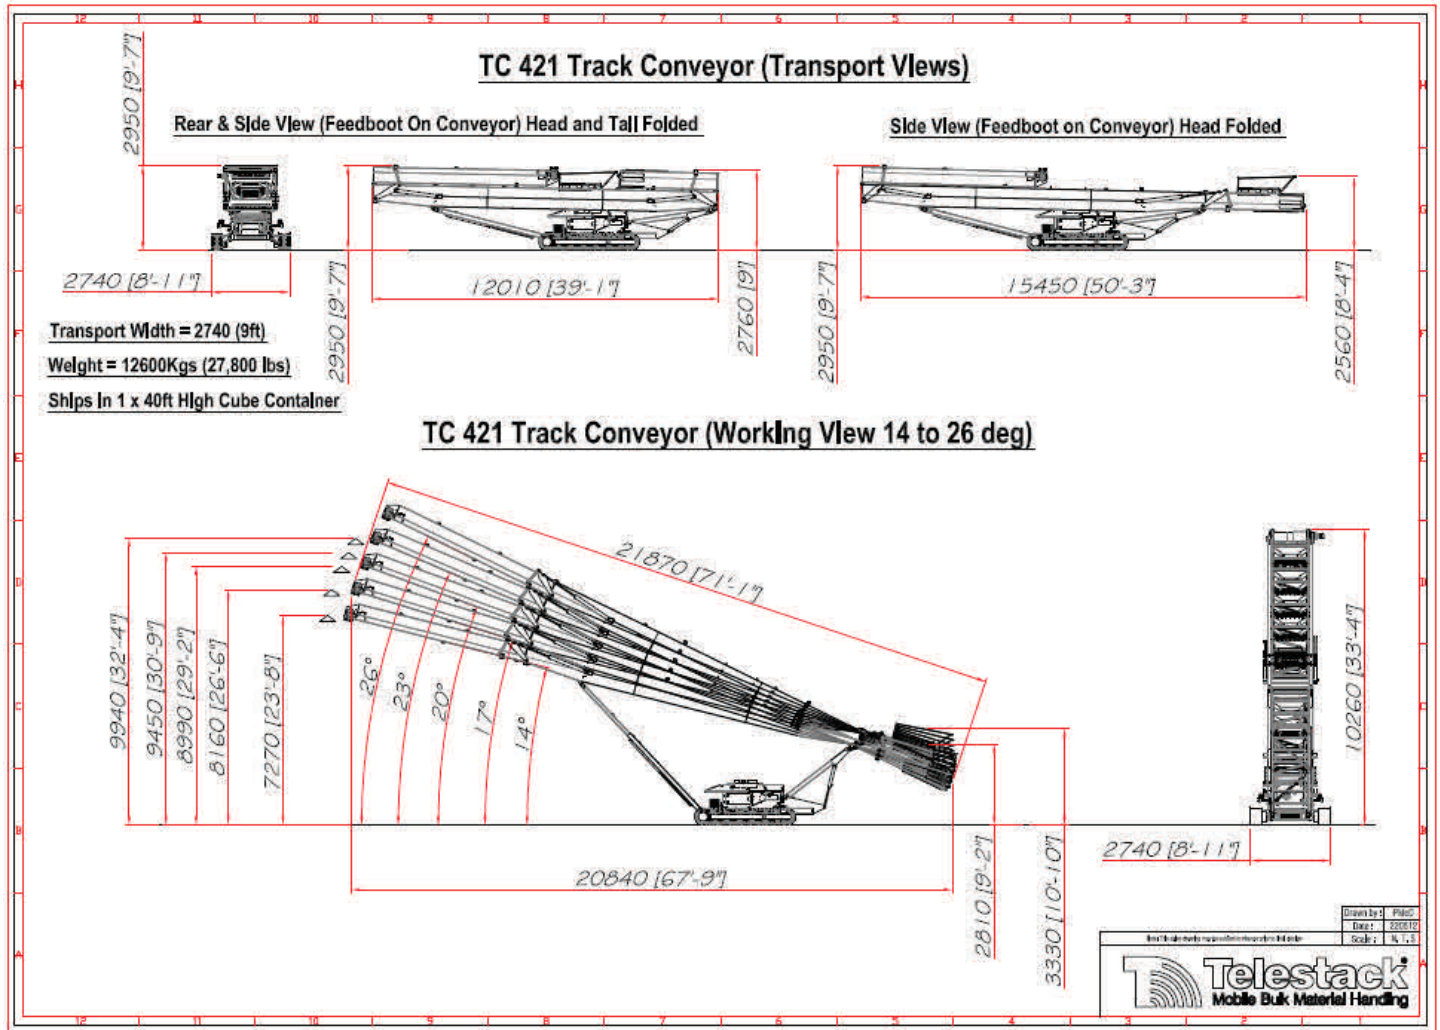

Transport on 1 x Low Loader (Ro Ro)

Transport Dimensions

Length	12.02m	(39ft 1")
Width	2.70m	(8ft 10")
Height	2.98m	(9ft 8")
Weight	12600kg	27800lbs

STOCKPILE CAPACITIES

Angle	Stockpile Height (m)	Stockpile Height (ft)	Capacity (m³)	Capacity (Tonne)	Capacity (Yards³)	Capacity (Ton)
14°	7.03	22ft 10"	640	1025	840	1130
17°	7.99	26ft	940	1505	1230	1660
20°	8.73	28ft 4"	1225	1965	1605	2165
23°	9.76	31ft 9"	1715	2745	2245	3025
26°	10.64	34ft 7"	2220	3555	2905	3920

Tonnage based on 1.6 Tonnes/m³
Typical Maximum single cone stockpile at 26°

2220m³ or 2905yards
3555 Tonnes or 3920 Ton (USA)

Conveyor can be repositioned to build multiple stockpiles.

Distributed by:

For Further Information

Telestack Limited

www.telestack.com

Tel: +44 (0) 2882 251100

Email: sales@telestack.com

**THE
POWER
TO MOVE
MATERIALS™**